

2-POLE FRONT VIEW


3-POLE FRONT VIEW

SIDE VIEW (TYPICAL)

NOTES:
 -BOND IS PROVIDED BY MEANS OF #6 COPPER WIRE BETWEEN OPERATING MECHANISM AND MOUNTING SCREW.
 -FOR SWITCHES EQUIPPED WITH KEY INTERLOCK, REFER TO DRAWING NO. 0-1023

AMP	CATALOG NUMBER*		A	B2	B3	C2	C3	D	E	F	G	H	J	K	M	N	P	R	S	T	
	2-POLE	3-POLE																			
240 VOLT																					
400	B225	B325	20.5	9.5	13.375	14.5	19	4.375	6.5	1.25	1.25	.875	4	1.75	4.5	8.5	2.75	1	4.5	38	
600	B226	B326	23.5	10	13.75	15	20	5	7.25	1.188	.75	.875	4.125	2.125	4.5	8.875	2.75	1.25	5	48	
600 VOLT																					
400	B265	B365	23.5	9.5	13.375	14.5	19	4.375	7.625	1.25	1.25	.875	4	1.75	4.5	8.5	2.75	1	4.5	38	
600	B266	B366	26.5	9.5	14	15	20	5	8.375	1.188	.75	.625	3.875	1.375	5	8.625	2.75	1.25	5	48	

AMP	RECOMMENDED MTG SCREWS	SIZE OF TERM. STUDS	RECOMMENDED LUG	RANGE
400	5/16-18	3/8-16	ILSCO XTA-600	2-600 MCM OR (2) 3/0-250 MCM CU-AL
600	5/16-18	3/8-16	ILSCO DI459	(2) 2-600 MCM CU-AL

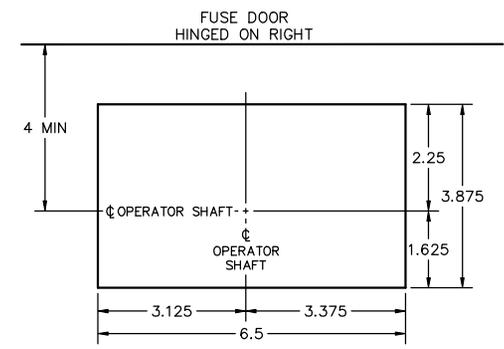

RECOMMENDED FRONT CUT-OUT

THIS RECTANGULAR CUT-OUT IS REQUIRED WHEN USING OPTIONAL E.U.S.E.R.C. PADLOCK CLIP

SERIES B

400 & 600A 2P2W & 3P3W, 240 & 600 V.A.C. FUSIBLE SWITCHES for NEC FUSE

SCALE:	APPROVED BY:	DRAWN BY JAE
DATE: 12-6-72		REVISED 10
boltswitch, inc. CRYSTAL LAKE, ILLINOIS 60014		DRAWING NUMBER O-1007

REV 10 6-30-98 "G" DIMENSION CORRECTED TO "F" ON 600A JAW RME
 REV 9 7-9-97 REDRAWN ON CAD, NEW FRONT CUT-OUT RME