




FRONT VIEW

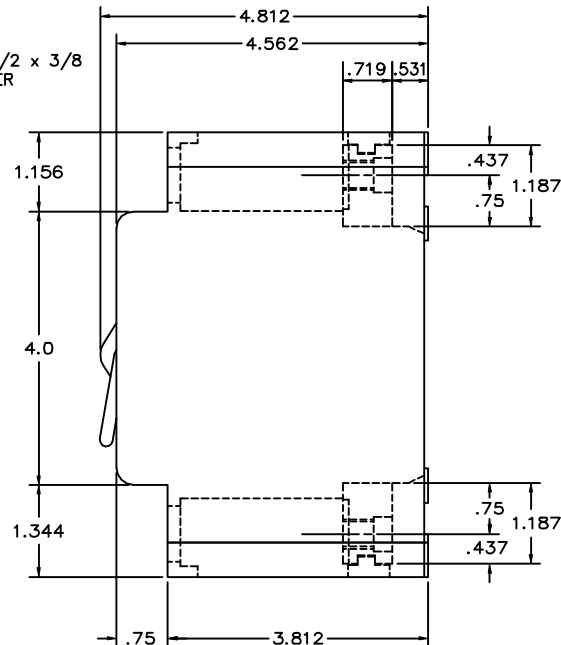


SIDE VIEW

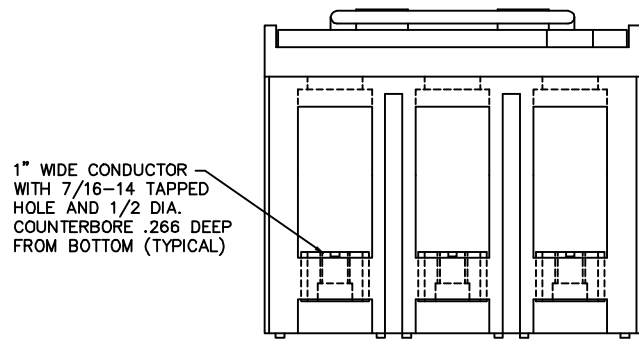

END VIEW

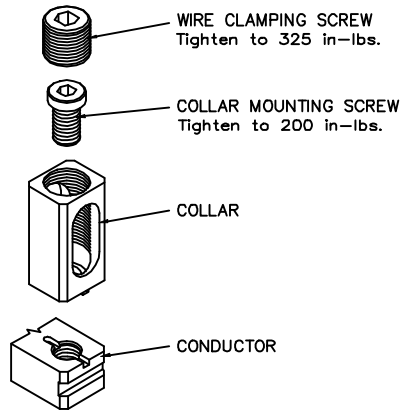

CAT. NO. TK400P
Wire Range 2-250 MCM to 2-3/0 CU

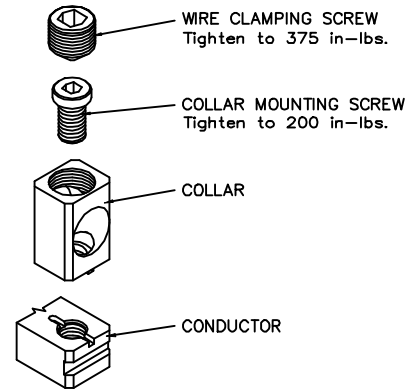

CAT. NO. TK350P
Wire Range 250 TO 500 MCM AL7CU

CLASS T FUSIBLE				
VOLTAGE	AMPACITY	CATALOG NUMBERS		
		1 - POLE *	2 - POLE *	3 - POLE
240 AC/125 DC	400	PT325-1P	PT325-2P	PT325
277 AC (1-P) 480Y/277 AC (2-P & 3-P)	400	PT335-1P	PT335-2P	PT335

* 1-POLE & 2-POLE UNITS HAVE SAME OVERALL DIMENSIONS AS 3 POLE UNITS. 1-POLE UNITS HAVE OUTER POLES OMITTED, 2-POLE UNITS HAVE CENTER POLE OMITTED.

NOTES:

- 240 & 480Y/277 VOLT CLASS T PULLOUTS ARE DESIGNED TO RECEIVE 300 VOLT CLASS T FUSES. FUSES ARE NOT INCLUDED.

REV 3 3-22-99 JWE 325 in-lbs WAS 275; CHANGED CHART TO SHOW 277AC FOR 1 POLE (335-1P)
REV 2 8-25-94 JAE DC NOTE REPLACED WITH RATING ON CHART. (ADDS DC RATING TO 3-POLE UNIT)
REV 1 5-10-94 JAE 1-POLE ADDED, DC RATINGS NOTE ADDED.

400 AMP, 240 & 480Y/277 VOLT FUSIBLE PULLOUT SWITCH		
SCALE:	APPROVED BY:	DRAWN BY JWE
DATE: 2-14-89		REVISED 3
boltswitch, Inc. CRYSTAL LAKE, ILLINOIS 60014		DRAWING NUMBER O-1473